

# 1.1 SG ZeroIn-MT™

## Dissolvable Ball Sealer - Medium Temperature



### Optimize Fluid Diversion and Enhance Stimulations

The near-buoyant ZeroIn-MT lightweight dissolvable ball sealer will temporarily seal perforations designed to seat on the center of the casing in horizontal/deviated wells. Vertical wells will provide the best ball action in lower rate stimulations.

#### Applications

- Plug open perforations for cleaning scale and paraffin
- Improve stimulation by diverting fluid to lower-permeability zones
- Help manage fluid in hydraulic fracturing stages and refracs

#### Features

- Compatible with standard stimulation fluid additives
- Dissolves in freshwater, brine, and acid
- Differential pressure tested with fluid up to 4000 psi [27.6 Mpa] and 200 °F [93 °C]

#### Benefits

- Maximizes perforation sealing in horizontal wells by matching the ball sealers to the specific gravity of the fluid
- Greater ball transport efficiency in horizontal laterals verse the traditional heavier (1.2 to 1.4 SG) ball sealers
- Quickly dissolves in hours after stimulation or fracturing stages
- Completely biodegradable material

### Properties


<b>Temperature range</b>	75 - 200 °F [24 - 93 °C]
<b>Appearance</b>	Orange
<b>Specific gravity</b>	1.1 +/- 0.05
<b>Solubility</b>	Compatible with freshwater, brine, and acid; incompatible with nonpolar solvents, such as diesel, benzene, xylene, kerosene, toluene
<b>pH fluids</b>	0-12
<b>Storage</b>	Keep product away from moisture; do not expose to temperature higher than 130 °F [54 °C]
<b>Size</b>	0.50 in [13 mm]; 0.625 in [16 mm]; 0.875 in [22 mm]; 1.0 in [25 mm]; 1.25 in [32 mm]

Please soak the 1.1 SG ZeroIn-MT ball sealer in mineral oil, which prevents clumping, before inserting into the gun launcher.




# Dissolvability Rates vs. Time

Dissolvability Curves in **2% Potassium Chloride (KCL)**  
1.1 SG Zeroln-MT 0.875 in [22 mm]

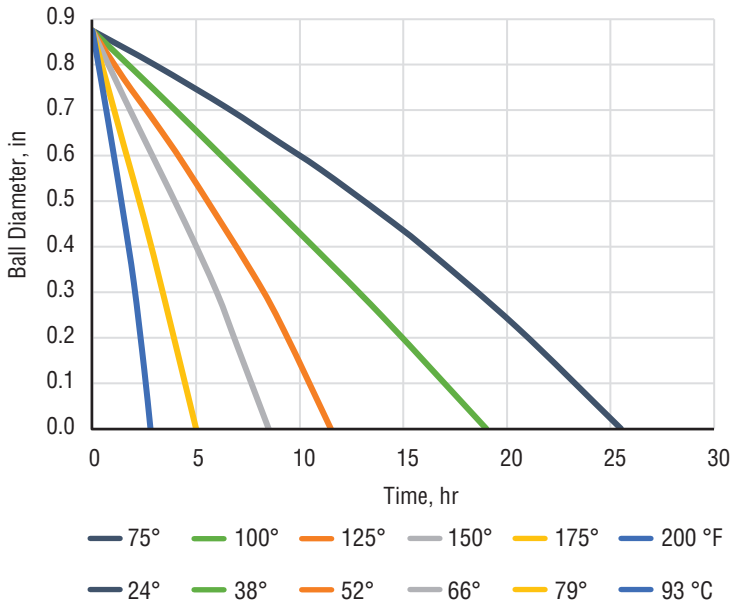

Dissolvability Curves in **15% Hydrochloric Acid (HCl)**  
1.1 SG Zeroln-MT 0.875 in [22 mm]

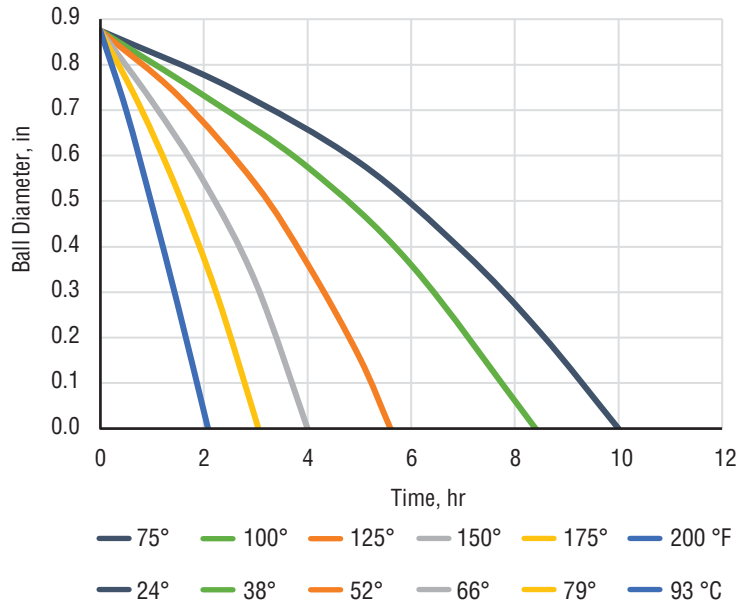

# Perforation Sealing Differential Pressure ( $\Delta P$ ) Sealing Time in Fluid vs. Temperature

Temp °F [°C]	$\Delta P$ Sealing Time* (Hours)			
	2% KCL		15% HCL	
	500 psi [3.45 Mpa]	1000 psi [6.9 Mpa]	500 psi [3.45 Mpa]	1000 psi [6.9 Mpa]
75 [24]	15	13	6.0	5.9
100 [38]	12	10	4.8	4.0
125 [52]	7.7	6.4	3.6	2.8
150 [66]	5.3	4.2	2.2	1.9
175 [79]	3.5	2.9	1.8	1.5
200 [93]	2.1	1.8	1.2	1.0

\* Time based on 0.875 in [22 mm] ball diameter capable of sealing a perforation size of 0.40 in [10 mm]

For more information about our 1.1 SG Zeroln-MT medium-temperature, dissolvable ball sealer that increases fluid efficiency, please **call us: 844-277-7373** or **email: [csr@perfsealers.com](mailto:csr@perfsealers.com)**.

Perf Sealers believes that the information in this product data sheet is an accurate description of the typical uses of oil and gas completions. Perf Sealers, however, disclaims any liability for incidental or consequential damages, which may result from the use of the product that is beyond its control. Therefore, it is the user's responsibility to thoroughly test the product in their particular application to determine its performance, efficiency, and safety.